

## Effect of Jet Reynold's Number on Nusselt Number for Convective Impingement Air Cooling on a Hot Plate

J. Ujam<sup>1\*</sup> & T. Onah<sup>2</sup>

1. Department of Mechanical Engineering, Enugu State University of Science and Technology (ESUT), Enugu, Nigeria

2. Department of Mechanical Engineering, Institute of Management and Technology (I.M.T), Enugu, Nigeria

\* E-mail: [ujamamechi@yahoo.com](mailto:ujamamechi@yahoo.com)

### Abstract

Studies were carried out to determine the Convective Heat Transfer Coefficient,  $h$ , under multiple jets of impinging cold air on a target heated flat plate. Tests were run with air- distribution plates with hole diameters,  $d$ , of  $1.5\text{mm}$ ,  $2.0\text{mm}$ ,  $2.5\text{mm}$  and  $3.0\text{mm}$ . The target plate is a carbon-steel flat plate of  $6\text{mm}$  thickness, instrumented with a total of three *Chromel-Alumel* K-type thermocouples. The plate is electrically heated using a variable supply current input. Test were run at various cooling air flow rate  $G$ , between  $1.0\text{kg/m}^3, \text{sec}$  to  $3.0\text{kg/m}^3, \text{sec}$ . Distribution plate-to-target plate distance  $Z(\text{mm})$ , was varied between  $100\text{mm}$  to  $200\text{mm}$ . Heat input to the target plate  $Q \text{ Watt}$ , was varied to give a heat flux rate between  $10$  to  $100 \text{ watts}$ . Results obtained were reduced and analyzed by evaluating for the dependence of  $h$  on the impingement jet diameter, Jet Reynolds Number, and the coolant mass flow rate  $G$ . Correlations were done, using the dimensionless parameters of Nusselt Number, Reynolds Number and Prandtl Number. Based on the results obtained, it is proposed that within the *Reynolds*

$$Nu = \frac{hD}{K} = 0.15Re^{0.58}Pr^{0.33}$$

Number range of  $1500$  to  $2000$ , correlation may be made with:-

**Keywords:** Reynold's Number, Nusselt Number, Prandtl Number, Impingement, Cooling, Heat transfer Coefficient

### 1.0 Introduction

Gas turbine combustors are also cooled by impinging air jets and there is increasing industrial interest to perfect the application for the cooling of combustor wall because it promises superior effectiveness over the conventional methods such as convective film and effusion cooling.

The necessity for more effective combustor wall cooling arises from the desire to obtain higher operating temperature in the gas turbine cycle for increased work per unit of mass throughput as well as better efficiency. This will lead to lighter engines and higher capacity turbines. Unfortunately, the practical limit to cycle temperature is fixed by the material of the combustor.

Many investigators have worked on impingement heat transfer. Earlier workers were more concerned with studies related to the use for heating and drying as applied in the paper and glass industries. Later workers have included other applications such as turbine blade cooling and combustor wall cooling. Some investigators worked with single rows of round and slot jets and some with multiple jet arrays.

In comparing previous work of the authors with the present work, two significant problems were encountered. Firstly, some workers had defined a heat transfer coefficient in terms of a temperature difference between the impingement jet outlet and the target plate whereas other workers had used a temperature difference between the coolant supply temperature and the target plate. In the present work, the significance of these differences is assessed. Secondly, many other workers had used impingement geometries with significant cross flow in the impingement gap. The significant of the cross flow influences in the present work is assessed by investigating spatial temperature distributions on the impingement plate.

Due to complexity of impinging jet structures in actual arrays, researchers have systematically studied the effects of geometrical parameters on heat transfer characteristics of impinging jets. Dano, Betrand, et-al<sup>[1]</sup> researched on the effects of nozzle geometry on the flow characteristics and the heat transfer performance. San and lai<sup>[2]</sup> studied the effect of jet-to-jet impingement spacing on heat transfer in staggered arrays. Cheong and Ireland<sup>[3]</sup> experimentally measured local heat transfer coefficient under an impinging jet with low nozzle-to-plate,  $z/d$  spacing. Several others have studied the effect of cross flow on jet structure and heat transfer including Florsguetz<sup>[4]</sup>, Kercher and Tabakoff<sup>[5]</sup>. Both Florschuets, and Kercher and Tabakoff developed correlations to predict the effects of cross flow on jet impingement heat transfer for inline and staggered arrays which are still used today in jet impingement research. Bailey and Bunker<sup>[6]</sup> studied the effect of sparse and dense arrays for large number of jets. Herbert and Ekkad<sup>[7]</sup>, investigated the effect of a stream wise pressure gradient for an inline array of sparse and dense configurations.

As more information on geometrical parameters and their effect on impinging jets became available, others

studied ways of increasing the jet effectiveness through target surface modification. Surface geometrics such as trip strips, protrusions or dimples can significantly alter the jet structure and potentially provide enhanced heat transfer. Ekkad and Kontrovitz<sup>[8]</sup> used a dimpled target surface.

This concept proved inadequate in heat transfer enhancement and actually showed a drop in performance. Another concept employed in many internal cooling configuration is trip strips. Small strip placed on the surface break down boundary layers, increase local turbulence levels, and enhance heat transfer. The use of trip strips was studied in detail by Han et al<sup>[9]</sup> for internal channel flow, and later by Herbert and Ekkad<sup>[10]</sup> in jet impingement configurations.

Andrews, Hussain and Ojobor S.N<sup>[11]</sup>, obtained full coverage impingement Heat Transfer, the influence of impingement jet size and correlated their result as  $h=460*(z/d)^{-0.15} * G^{0.8}$ .

However, Hollworth and Berry<sup>[12]</sup> obtained a test rig with single sided air exit so that there was always an influence of cross flow. Secondly, the method of calculating the heat transfer coefficient using a long-mean of the temperature differences between the impingement plate and the plenum chamber air temperature was studied. This was an attempt to use a coolant temperature close to a jet outlet temperature. Hollworth and Berry also recognized this problem and they used a coolant temperature which was the average of the plenum temperature and jet outlet temperature. Thereafter, many other workers have used the plenum chamber temperature as the coolant. As the temperature differences between the coolant and the impingement plate varies with the coolant flow rate, the present method of evaluating  $h$  could give a slightly different value for  $y$  than using the plenum chamber temperature. This value of  $y$  is a function of  $z/d$

In this present work - impingement of air cooling on a hot plate of varied flow rate of air, was studied on a hot target plate. The influence of temperature difference and quality of heat input were considered for values of  $h$ , these however, were correlated with Reynolds number, Nusselt number, Prandtl number and coolant flow per unit surface area to show influence with  $h$  values.

## 2.0 Materials and Methods

### 2.1 Design of Rig

In order to evaluate the coefficient of convective heat transfer,  $h$ , an impingement air cooling method was designed for this target.

The design is based on segment of components parts and assembly. The plenum has three chambers; the first is distribution plate chamber of circular cylinder of 250mm high by 300mm in diameter with fixed curved 40mm pipe that connects the pipe of 40mm diameter to blower. This chamber also has fixed pressure gauge and thermometer at the end. In between the iron pipes is an orifice meter connected to its plate of diameter 20mm to measure flow rate of air.

The second chamber plate is also 250mm high by 300mm in diameter. The third segment is the spacer called impingement gap ( $Z_1$  to  $Z_4$ ) that varied from 100mm high to 300mm in diameter, 150mm high and 300mm in diameter, 200mm and 250mm with same diameter. All the chambers are of 2mm thickness and made of mild steel sheet.

However each of these segments is joined by two adjustable bolt clips with aid of alien – key for different impingement gap test. This gaps  $Z_x$  is replaced with heater plate via distribution chamber at each test.

The target plate is supplied with heat by electrically insulated heater and on top of the plate is fixed three K-type thermocouples for measuring mean temperature for each test.

Other important components are four circular impingement plates of 150mm diameter, each drilled with 1.5mm, 2.0mm, 2.5mm and 3.0mm respectively, with 81 number holes in each.

### 2.2 Instrumentations

The calculation of convective impingement heat transfer coefficient of air and other materials involves the use of some instruments to acquire some vital data needed for the calculation. Some of these instruments used are:-

#### 2.2.1 Thermocouples:

Analogue K-type thermocouples were used. The range is -323K to 1573K with tolerance of  $\pm 0.75\%$ . K-Type is described as 3.24 x 150mm metal sheath 100cm compensating wire. This gives us the average mean temperature used in calculation of temperature difference. The K-type (Chromel–Alumel) is the most commonly general purpose thermocouple.

#### 2.2.2 Thermometer:

An analogue thermometer was used. This mercury thermometer of 0°C to 100°C was used to measure air temperature. Air is first blown into the plenum and its temperature was measured.

#### 2.2.3 Ammeter/Voltmeter:

A multi-purpose digital clamp meter with operating features of AC current 0.1A to 1000A, AC voltage 1V to 750V and DC voltage 1V to 1000V was used with the help of variable voltmeter. As the voltage was varied with variable voltmeter, the corresponding current was automatically obtained by digital clamp meter.

The product of these two quantities gave the heat input to the system used for calculations.


### 2.2.4 Orifice Meter:

An orifice meter was used to measure pressure drops along the pipes. It was fixed on the base wood and connected to the pipe of 40mm diameter. Also connected in-between the orifice is the orifice plate of diameter 20mm inside the 40mm diameter pipe with angle of 60° vena-contracta. The pressure drop is thus measured by difference in height of water in the orifice meter with calibrated meter rule.

### 2.2.5 Pressure gauge:

This was used to measure the pressure of air. This plus atmospheric pressure gives absolute pressure used in the calculation. Its calibration ranges from -1bar to 5bars

## 2.3 Experimental Procedure

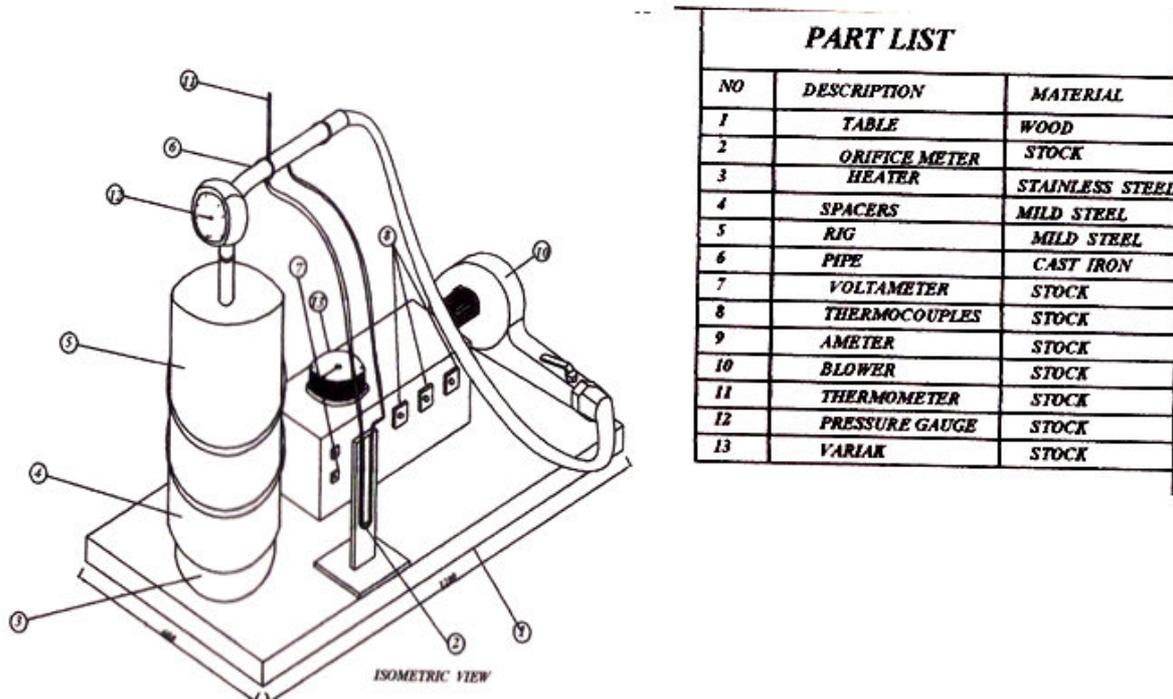

**Fig 1 set up rig for experimentation in laboratory**

Experiments were made at several air mass flow rates via orifice plate to target plate.

The procedures are as listed below:-

1. The air supply to the plenum as well as the heater was turned on.
2. The initial values of temperature and pressure of the air were read and recorded. The values of the tip temperatures of the thermocouples  $T_1$ ,  $T_2$  &  $T_3$  were also read and recorded.
3. The values of current and voltage were read from the ammeter and voltmeter, to obtain the quantity of heat input  $Q$
4. Values of the pressure drop ( $\Delta h$ ), were all recorded using the orifice meter.
5. The thermocouple readings were monitored until a near steady state – isothermal condition is achieved i.e.  $T_1, T_2, T_3$  are within 10% of each other, and later  $(T_{mean} - T_{air}) \geq 12^\circ K$  were obtained (by adjusting the power input to the hot plate).
6. Thereafter, final reading for that particular flow rate of air say  $\frac{1}{4}$  flow rate of air was taken.
7. The experiment was repeated with a higher flow-rate of air, say  $\frac{1}{2}$ ,  $\frac{3}{4}$  and full flow.
8. After each flow rate of air the spacer (impingement gap)  $Z$  was changed and the procedures repeated as above.

### 3.0 Experimental Results

The results of the experiment are shown in tables below.

**Table 1 - $\frac{1}{4}$  flow rate of air @ 1.5mm impingement plate with  $Z_1 = 100$ mm spacer.**

S/N	$T_{air}$	$P_{air}$	A(amp)	V(volts)	Q(watt)	T1	T2	T3	$T_m$	$T_m - T_{air}$	$\Delta h$ (cm)
1	35	0.5	0.5	1.7	8.5	160	162	162	161.3	126.3	4.4
2	35	0.5	0.7	25	17.5	180	188	188	185.3	150.3	4.4
3	35	0.5	0.9	28	25.2	200	201	205	202	167	4.4
4	35	0.5	1.1	36	39.6	225	225	225	225	190.0	4.4
5	35	0.5	1.3	50	65.0	230	230	230	230	195	4.4
6	35	0.5	1.5	56	84.0	225	225	225	225	2200	4.4
7	35	0.5	1.7	66	112.2	270	270	270	270	235.0	4.4
8	35	0.5	1.9	70	133	297	297	297	297	262.0	4.4

**Table 2 - $\frac{1}{2}$  flow rate of air @ 2.0mm impingement plate with  $Z_1 = 100$ mm spacer**

S/N	$T_{air}$	$P_{air}$	A(amp)	V(volts)	Q(watt)	T1	T2	T3	$T_m$	$T_m - T_{air}$	$\Delta h$ (cm)
1	36	0.6	0.5	16	8.0	152	152	159	154.3	118.3	6.4
2	36	0.6	0.7	25	17.5	170	176	175	172	136.0	6.4
3	36	0.6	0.9	28	25.2	182	182	182	182	146.0	6.4
4	36	0.6	1.1	38	41.8	196	197	199	197	161.0	6.4
5	36	0.6	1.3	40	52.0	200	200	200	200	164.0	6.4
6	36	0.6	1.5	55	82.5	223	223	227	224.3	188.3	6.4
7	36	0.6	1.7	60	102.0	232	232	232	232	196.0	6.4

**Table 3 - $\frac{3}{4}$  flow rate air @ 2.5mm impingement plate with  $Z_1 = 100$ mm spacer.**

S/N	$T_{air}$	$P_{air}$	A(amp)	V(volts)	Q(watt)	T1	T2	T3	$T_m$	$T_m - T_{air}$	$\Delta h$ (cm)
1	37	0.7	0.5	15	7.5	130	134	136	133.3	96.3	7.2
2	37	0.7	0.7	25	17.5	153	155	157	155	118.0	7.2
3	37	0.7	0.9	30	27.0	170	172	176	172.7	135.7	7.2
4	37	0.7	1.1	36	39.6	191	193	195	193	156.0	7.2
5	37	0.7	1.3	42	54.6	213	215	217	215	178.0	7.2
6	37	0.7	1.7	57	76.5	232	234	236	234	197.0	7.2
7	37	0.7	1.7	57	96.9	248	249	250	249	212.0	7.2
8	37	0.7	1.9	68	129.2	260	260	260	260	223.6	7.2

**Table 4 -Full flow rate of air @ 3.0mm impingement plate with  $Z_1 = 100$ mm spacer.**

S/N	$T_{air}$	$P_{air}$	A(amp)	V(volts)	Q(watt)	T1	T2	T3	$T_m$	$T_m - T_{air}$	$\Delta h$ (cm)
1	38	0.8	0.5	16	8.0	128	132	135	131.7	93.7	10.5
2	38	0.8	0.7	22	11.0	143	144	146	144.3	106.3	10.5
3	38	0.8	0.9	28	25.2	148	149	150	149.0	111.0	10.5
4	38	0.8	1.1	35	38.5	161	164	168	164.3	126.3	10.5
5	38	0.8	1.3	38	49.4	176	177	178	177.2	139.2	10.5
6	38	0.8	1.5	45	67.5	189	190	191	190	152.0	10.5
7	38	0.8	1.7	55	93.5	207	209	210	208.6	170.6	10.5
8	38	0.8	1.9	60	114.0	221	223	226	223.3	195.3	10.5

### 3.1 Analysis of Results

#### 3.1.1 Pipe Diameters and Number of Holes

- 1) Orifice pipe diameter = 40mm
- 2) Orifice plate diameter = 20mm
- 3) Impingement plate diameter = 150mm
- 4) Hot target plate diameter = 200mm
- 5) Number of holes, n = 81

### 3.2 Data Reductions

$$3.2.1 \text{ Impingement plate area} = \dot{A} = \frac{\pi D^2}{4} = \frac{\pi(0.150)^2}{4} = 0.01767 m^2 \quad (1)$$

#### 3.2.2 Total mass flow rate

$$\dot{m} = \check{U} \rho_{air} A^* \quad (2)$$

$$A^* = \frac{\pi D^2}{4} = \frac{\pi(0.040)^2}{4} = 0.001257 m^2$$

Where  $\check{U}$  = velocity of orifice meter

$A^*$  = orifice pipe sectional area

$$\check{U} = \frac{\sqrt{2\Delta P}}{\sqrt{Cd \left(\frac{A1}{A2}\right)^2 - 1} \rho_{air}} \quad (3)$$

$$\check{U} = Cd \sqrt{\frac{2\Delta P}{\rho_{air}}} \quad (4)$$

Where  $Cd$  = coefficient of air flow from orifice plate  $\approx 0.70$

$$\therefore \check{U} = 0.70 \sqrt{\frac{2\Delta P}{\rho_{air}}} \quad (5)$$

$$\text{Thus } \dot{m} = \check{U} \rho_{air} (0.001257) \quad (6)$$

Where  $(0.001257)m^2$  = area of orifice plate as calculated.

Data values:  $K$  = thermal conductivity for air = 0.0023567 J/m, sec, k

$\mu$  = dynamic viscosity = 1.817 x 10<sup>-5</sup> kg/m, sec.

$$G = \frac{\dot{m}}{A'} = \frac{\dot{m}}{0.01767} \quad (7)$$

$\dot{A}$  = Area of impingement plate calculated

$G$  = Coolant air flow per unit surface area of the impingement plate kg/s,m<sup>2</sup>

$$Nu = \frac{hD}{K} \quad (8)$$

$$Pr = \frac{\mu C_p}{K} = 0.8828 \quad (9)$$

Where  $K$  = 0.0023567 J/sec, m, k

$\mu$  = 1.817 x 10<sup>-5</sup> kg/m,sec (based on hole diameter)

$$Nu = \frac{hD}{0.0023567} \quad (10)$$

$$Q = h * A^* * \Delta T \quad (11)$$

$$A^* = \pi \frac{(0.20)^2}{4} = 0.0314 m^2$$

$$\text{Thus, } Q = 0.0314 h * \Delta T \quad (12)$$

$A^*$  = area of hot target plate = 200mm

Thus,  $Q = 0.0314 * h * (t_m - t_{air})$

$$h = \frac{Q}{0.0314(t_m - t_{air})} \tag{13}$$

$$Nu = \frac{hD}{0.0023567} = 424.33 * h * D \tag{14}$$

$$Re = \frac{\rho_{air}VD}{\mu} \tag{15}$$

Where V = velocity through the impingement hole

Based on Jet velocity; A = jet hole area

$$\frac{\dot{m}}{n} = \rho VA \tag{16}$$

Where n = number of holes = 81

$$\mu = 1.817 * 10^{-5} \text{ kg /m, sec}$$

$$\therefore Re = 86.47 \frac{\dot{m}}{D} \tag{17}$$

#### 4.0 Effect of Jet Reynolds Number on Nusselt Number (Nu/Pr<sup>0.3</sup> for Pr = 0.8828)

	1		2		3		4	
S/No	X = Rey No	Y= Nu/0.8828						
1	494	5.585	552	6.903	522	8.907	522	8.307
2	1597	8.367	1597	7.568	1597	10.412	1597	10.755
3	1828	11.886	1828	9.593	1828	11.907	1828	11.907
4	1960	13.163	1960	10.672	1960	12.385	1960	12.566

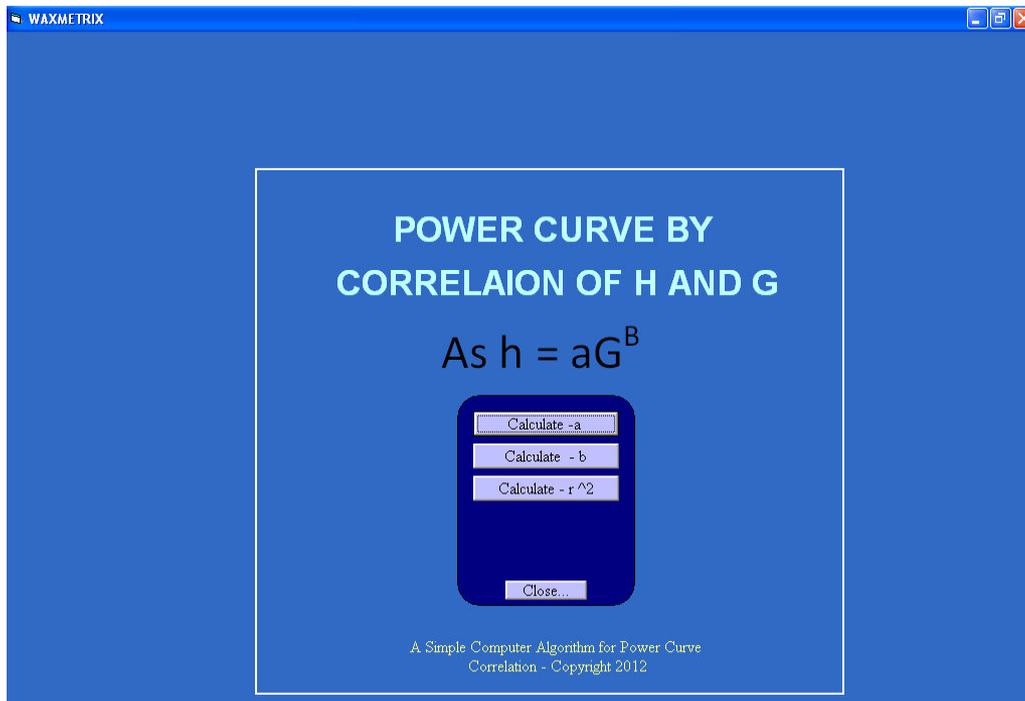


Fig.2 Power Curve Data Presentation

**Program Control Interface**

$$b = \frac{\sum \ln G_i h_i - \frac{(\sum \ln G_i)(\sum \ln h_i)}{n}}{\sum (\ln G_i)^2 - \frac{(\sum \ln h_i)^2}{n}}$$

$$a = \exp \left[ \frac{\sum \ln y_i}{n} - b \frac{\sum \ln X_i}{n} \right]$$

$$r^2 = \frac{[\sum \ln X_i \ln y_i - \frac{(\sum \ln X_i)(\sum \ln y_i)}{n}]^2}{\left[ \sum (\ln X_i)^2 - \frac{(\sum \ln X_i)^2}{n} \right] \left[ \sum (\ln y_i)^2 - \frac{(\sum \ln y_i)^2}{n} \right]}$$

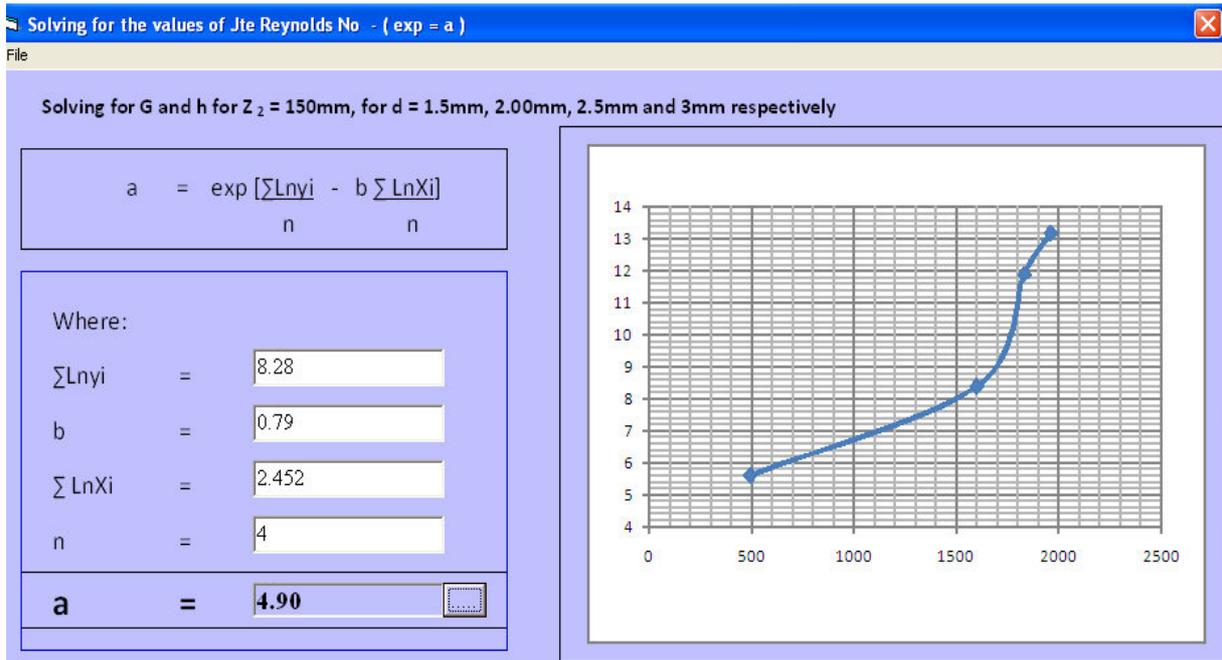


Fig 3: Program Interface for calculating a

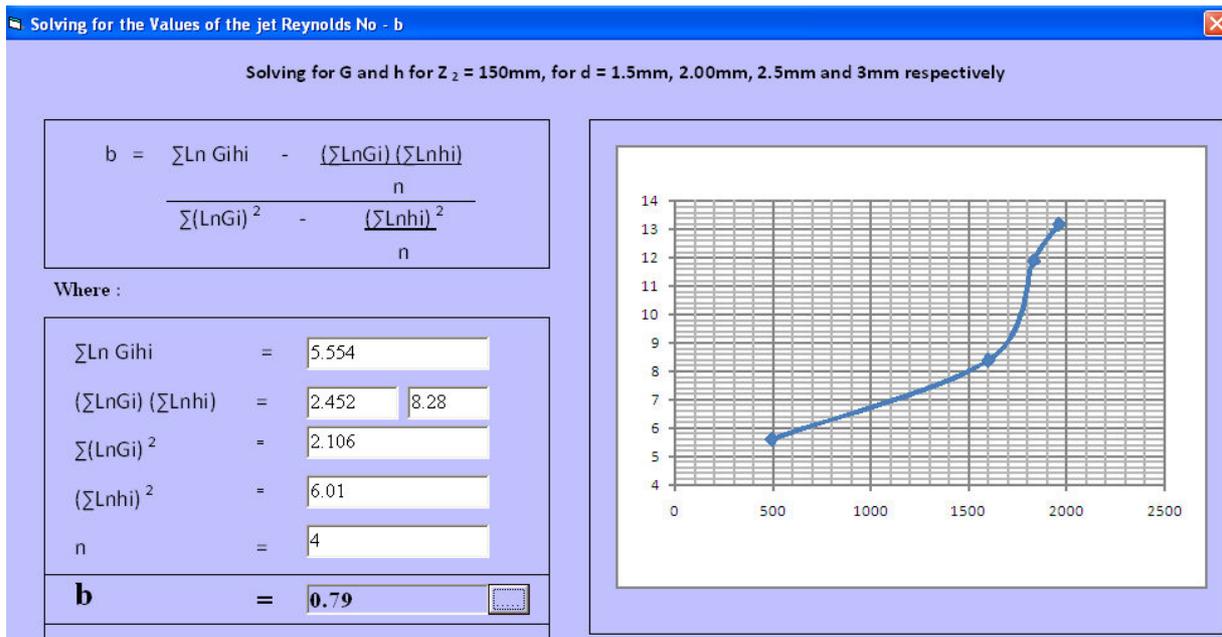


Fig 4: Program Interface for calculating b

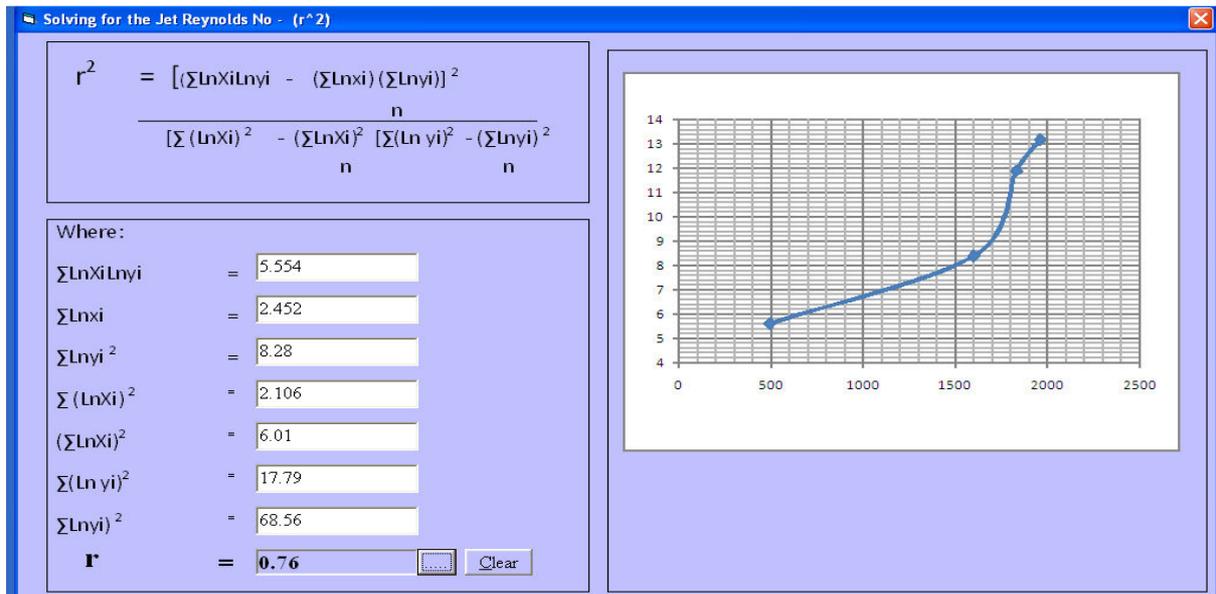


Fig 5: Program Interface for calculating r

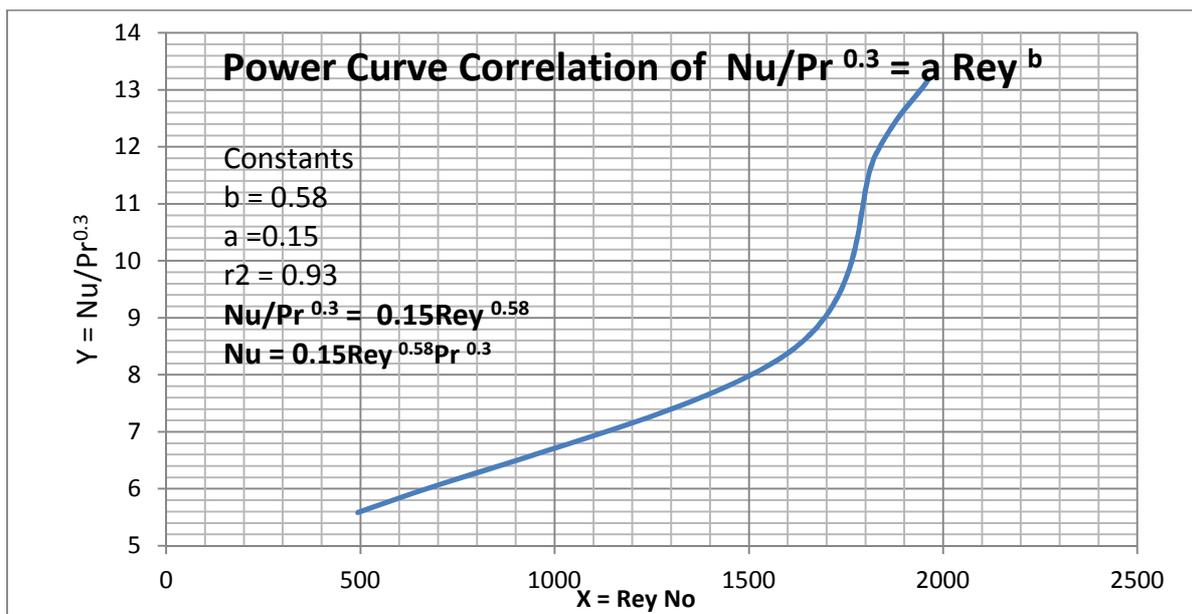


Fig. 6 Plot of Nusselt Number versus Reynold's Number for Plate a

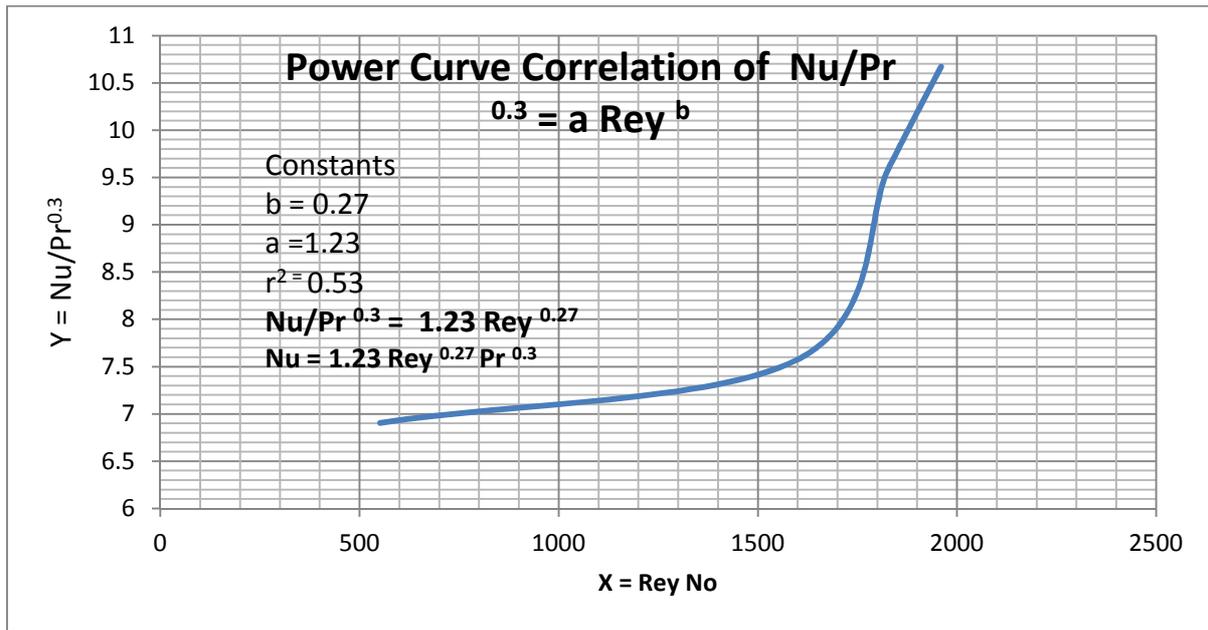


Fig. 7 Plot of Nusselt Number versus Reynold's Number for Plate b


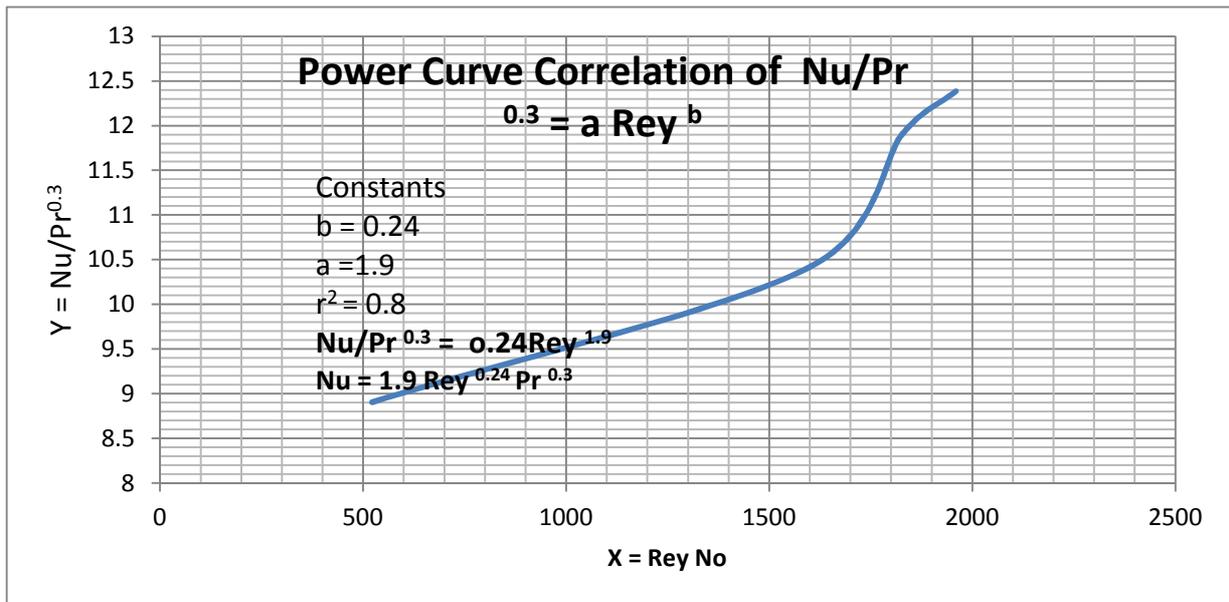


Fig. 8 Plot of Nusselt Number versus Reynold's Number for Plate c

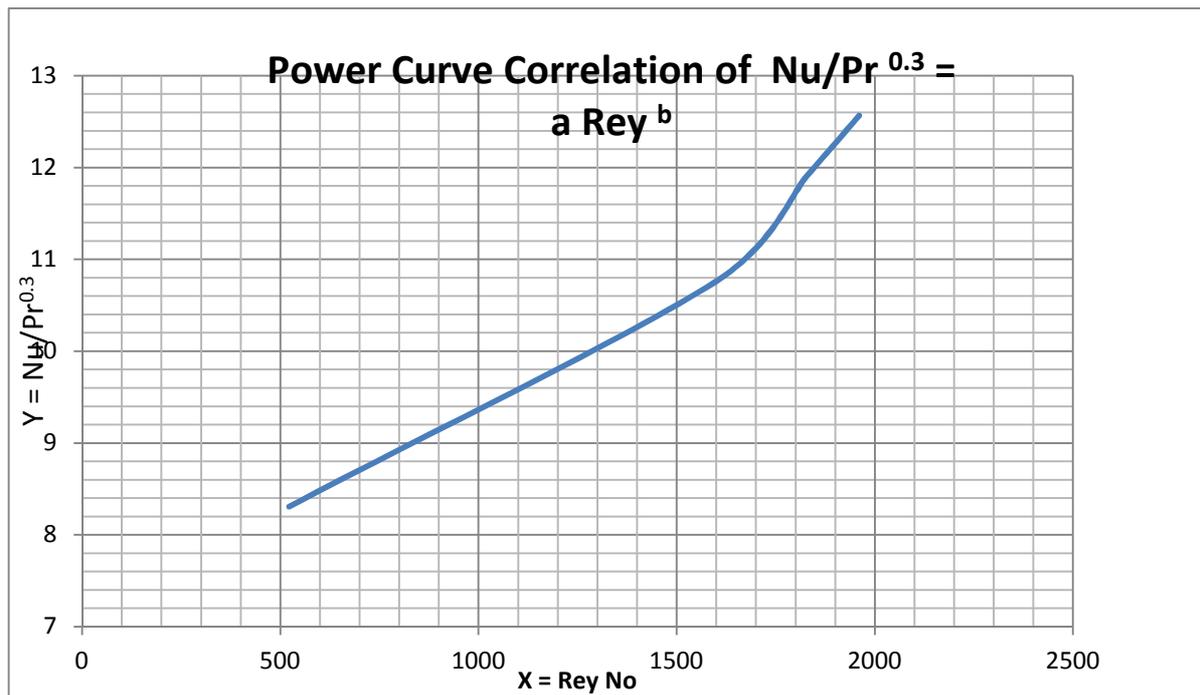

**Fig.9 Plot of Nusselt Number versus Reynold's Number for Plate d**

**4.0 Discussion of Results**

The values of Reynold's Number achieved in this work are generally low and in the laminar flow regime. Figures of about 500 were obtained for Jet diameter of 3.0mm, though for diameter 1.5mm and 2.0mm, Reynold's Number rose to about 2000. High Reynold's Number fully in the turbulent regime is essential to achieve the full benefits of impingement cooling as an agitated flow scheme enhances convective transport of energy.

The likely consequence of this low Reynold's number may have been that film-cooling behavior dominated the mode of convective heat exchange. The mode of convective heat exchange, indeed the low values of the coefficient which did not exceed 30W/m<sup>2</sup> °C resemble typical values of the coefficient for film and effusion cooling.

The principal handicap in achieving higher Reynold's Number in this Work is the apparently low capacity pressure head of the blower used.

**5.0 Conclusion**

Convective impingement heat transfer (*h*), evaluated from the heat input (*Q*) and the product ratio of area of hot target plate (*A\**) and the difference in mean temperature to air temperature, is a strong function of impingement coolant mass flow per unit surface area (*G*) of the impingement plate by correlation.

Secondly, it is also dependent on the number of holes, *n*, of 81 number holes on the impingement plate and to the jet impingement velocity, the coolant viscosity, the diameter of the pipe and the capacity of the blower.

The ratio of Nusselt to Prandtl number to power 0.3 is also a function of Reynold's number by correlation.

However, the equations of correlated values are;

$$Nu = \frac{hD}{K} = 0.15Re^{0.58} pr^{0.33}$$

The constants *a* and *b* are valid for power curve fit of the range of values of *r* of  $0.73 \geq r \geq 0.96$  for the correlation of

$$Nu = \frac{hD}{K} = 0.15Re^{0.58} pr^{0.33}$$


This shows that  $r \geq 0.6$  is valid for the power curve fit for influence of *Re* on  $Nu/pr^{0.3}$ .

Finally the constants in the above correlations applied for impingement air temperature of 93.2°C to 293°C



## References

1. Dano, Bertrand, et al, 'Flow Characteristics and Heat Transfer Performance of a Semi-Confined Impingement Array of Jet: Effect of Nozzle Geometry,' "International Journal of Heat and Mass Transfer Vol. 48, 2005: 691-701.
2. San, Jung-Yang and Mao. De Lai. "Optimum Jet-to-Jet Spacing of Heat Transfer for Staggered Arrays of Impinging Air Jets." International Journal of Heat and Mass Transfer Vol. 44, 2001: 3997 – 4007
3. Cheong, C.Y and Peter Ireland Flow and Heat Transfer Characteristics of an Impinging Jet in Crossflow at Low Nozzle- to- Target Spacing: Part I. Proc. of the ASME Turbo, June 2005, Reno-Tahoo. Nv.
4. Florschuetz, L.W, D.E. Metzger, and C.C. Su, "Heat Transfer Characteristics for Jet Array Impingement with Initial Crossflow", Journal of Heat transfer Vol. 106, 1984: 34-40.
5. Tabakoff, W. Clevenger, W. 'Gas Turbine Heat Transfer Augmentation by Impingement of Air Jets Having Various Configurations, ASME, Journal of Engineering for Power, Jan. 1972, pp. 51-60
6. Bailey, J.C. and R.S. Bunker Local Heat Transfer and Flow Distribution for Impinging Jet Arrays of Dense and Sparse Extent. Proc. of the ASME Turbo Expo, June 2002, Amsterdam: Netherlands.
7. Hebert, Ryan, Srinath Ekkad, and Lujai Gao. "Impingement Heat Transfer Part II: Effect of Streamwise Pressure Gradient." Journal of Thermo Physics and Heat Transfer Vol. 18, 2004.
8. Ekkad, S.V. and D.M. Kontrovitz, 'Jet Impingement Heat Transfer on Dimpled Target Surfaces', International Journal of Heat and Fluid Flow Vol. 23, 2002:22-28
9. Han, J.C., J.S. Park, and C.K. Lei, "Augmented Heat Transfer in Rectangular Channels of Narrow Aspect Ratios with Rib Turbulators. "International Journal of Heat and Mass Transfer Vol. 32, 1989: 1619-1630.
10. Hebert, Ryan, Srinath Ekkad, and Lujai Gao. "Impingement Heat Transfer Part II: Effect of Streamwise Pressure Gradient." Journal of Thermo Physics and Heat Transfer Vol. 18, 2004.
11. Andrews, G.E., Hussain, C.I., and Ojobor, S.N. "Full Coverage Impingement Heat Transfer. I. Chem. E., Symposium Series No 86, 1985 and Text Book on Impingement Heat Transfer: 2008
12. Hollworth, B.R. and Barry, R.D. "Heat Transfer from Array of Impinging Jets with Large Jet-to-Jet Spacing, ASME, Paper No. 78 – GT-117.


## Appendix: Components of the Rig

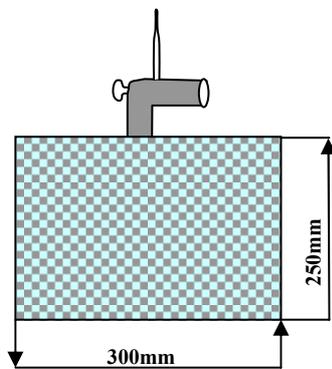

**Fig 10:1<sup>st</sup> Distribution Plenum**

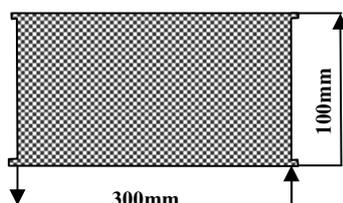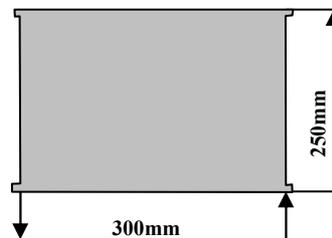


**Fig 11a**

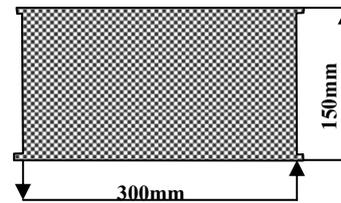


**Fig 11b**

**Fig 11:2nd Distribution Plenum**

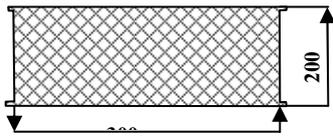


**Fig 12a**

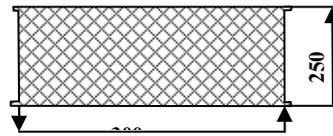


**Fig 12b**


**Fig 12: 3<sup>rd</sup> Segment plates (impingement gaps  $Z_x$ )**

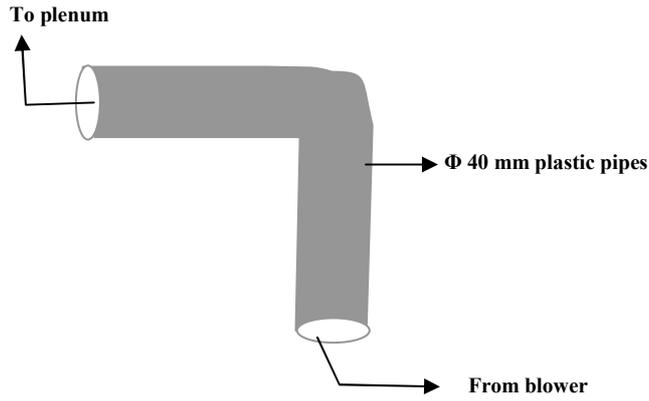


**Fig 13: Plastic pipe**

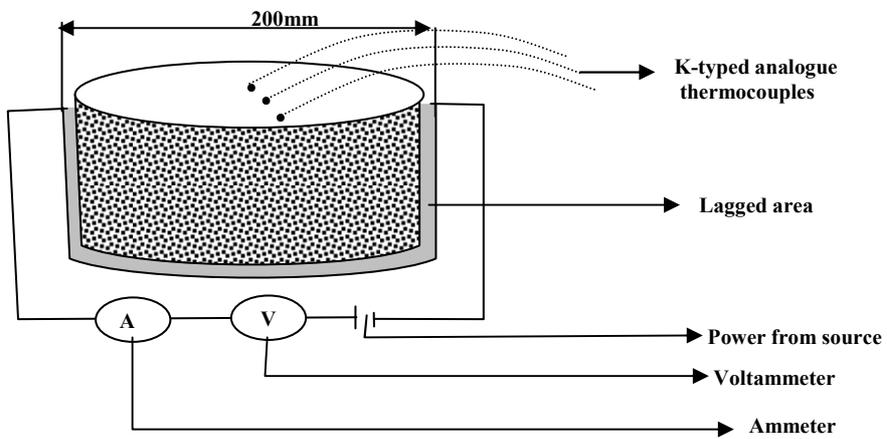


**Fig 14: Electric heater with thermocouples**

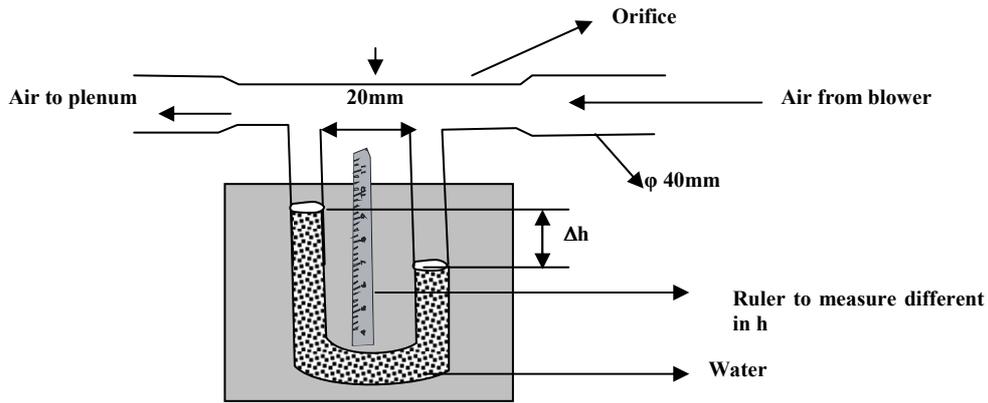


**Fig 15: Orifice meter**

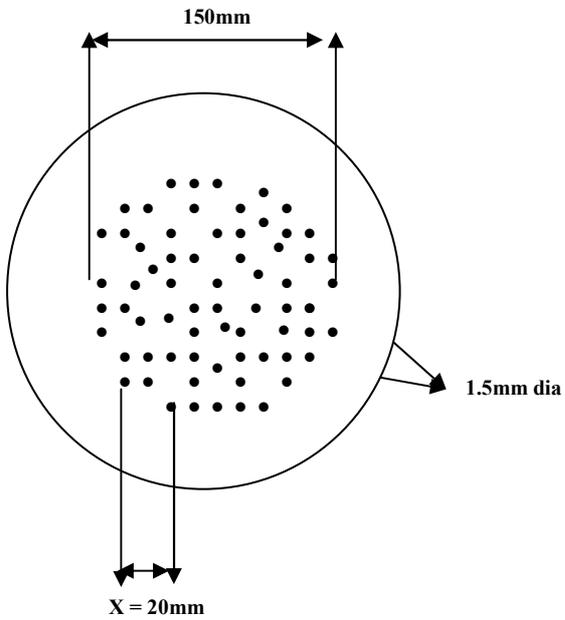


**Fig 16 a**

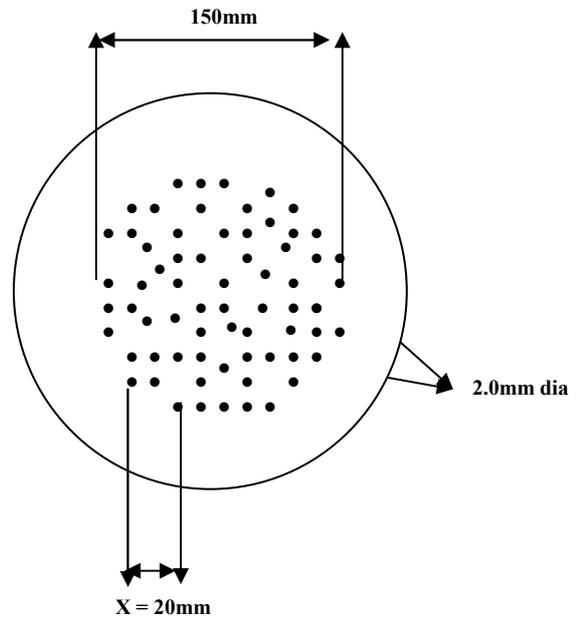

**Fig 16 b**

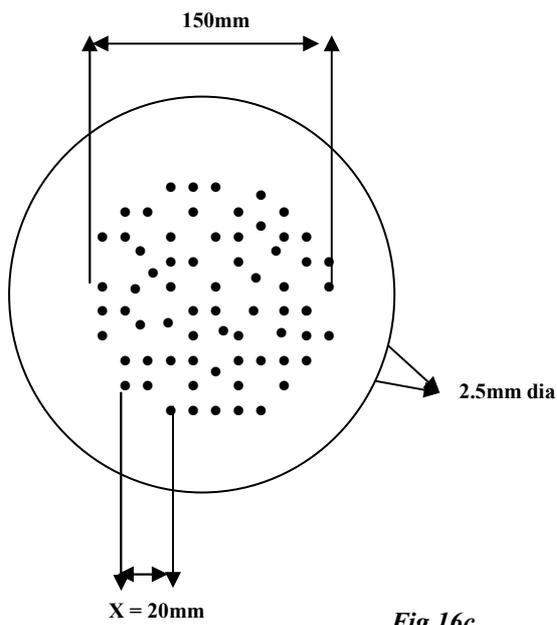

*Fig 16c*

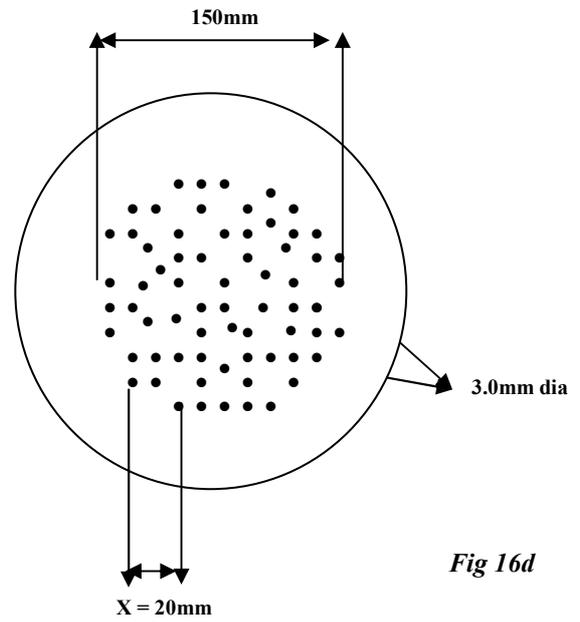

*Fig 16d*

**Fig 16: View of impingement plates**

***The total number in each of the impingement plate is 81 holes***

This academic article was published by The International Institute for Science, Technology and Education (IISTE). The IISTE is a pioneer in the Open Access Publishing service based in the U.S. and Europe. The aim of the institute is Accelerating Global Knowledge Sharing.

More information about the publisher can be found in the IISTE's homepage:

<http://www.iiste.org>

## CALL FOR JOURNAL PAPERS

The IISTE is currently hosting more than 30 peer-reviewed academic journals and collaborating with academic institutions around the world. There's no deadline for submission. **Prospective authors of IISTE journals can find the submission instruction on the following page:** <http://www.iiste.org/journals/> The IISTE editorial team promises to review and publish all the qualified submissions in a **fast** manner. All the journals articles are available online to the readers all over the world without financial, legal, or technical barriers other than those inseparable from gaining access to the internet itself. Printed version of the journals is also available upon request of readers and authors.

## MORE RESOURCES

Book publication information: <http://www.iiste.org/book/>

Recent conferences: <http://www.iiste.org/conference/>

## IISTE Knowledge Sharing Partners

EBSCO, Index Copernicus, Ulrich's Periodicals Directory, JournalTOCS, PKP Open Archives Harvester, Bielefeld Academic Search Engine, Elektronische Zeitschriftenbibliothek EZB, Open J-Gate, OCLC WorldCat, Universe Digital Library, NewJour, Google Scholar

